

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number  
**WO 02/068258 A1**

(51) International Patent Classification<sup>7</sup>: **B62D 29/00**,  
B29C 45/14

(21) International Application Number: PCT/US02/06396

(22) International Filing Date: 28 February 2002 (28.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/271,939 28 February 2001 (28.02.2001) US

(71) Applicant: **E.I. DUPONT DE NEMOURS AND COMPANY** [US/US]; 1007 Market Street, WILMINGTON, DE 19898 (US).

(72) Inventor: **BAUHOFF, Michael, J.**; 4136 Washington Crescent, Troy, MI 48098 (US).

(74) Agent: **HAMBY, William, H.**; E.I. Dupont de Nemours and Company, Legal Patent Records Center, 4417 Lancaster Pike, Wilmington, DE 19805 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: INTEGRAL STRUCTURES OF METAL AND PLASTIC

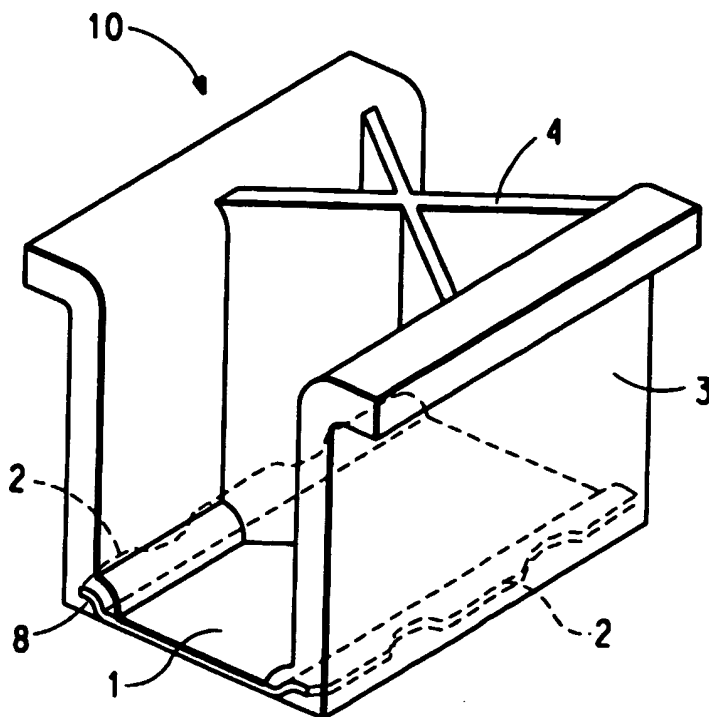

(57) Abstract: Integral structures (10, 20, 30) are formed using a combination of both metal and plastic. These materials are secured together by the unique design of the metal in areas of contact with the plastic. Ribbed structures (4) in which metal is suitably joined with injection molded plastic are also contemplated herein.

WO 02/068258 A1

TITLE  
INTEGRAL STRUCTURES OF METAL AND PLASTIC

5                    FIELD OF THE INVENTION

The present application relates to structures made from a combination of both metal and plastic. More particularly, the present invention relates to ribbed structures in which metal is suitably joined with  
10 injection molded plastic.

BACKGROUND OF THE INVENTION

Material selection for the development and fabrication of structures involves any number of  
15 considerations. For example, the use of metals offers obvious benefits in strength while the use of plastics offers equally attractive benefits in moldability and lack of conductivity. However it is also well recognized that any materials also necessarily carry design  
20 limitations. For example, metals are obviously quite heavy and may not be suitable for weight-constrained applications, while plastics may not be suitable for applications requiring rigidity and durability. Researchers have long been interested in developing  
25 approaches to bring metals and plastics together into a structure or application.

US 5,085,722 provides a composite material of a flat metal substrate with a number of apertures, with plastic  
30 material and reinforcing fibers that attach to the metal through these apertures. The composite is described as having greater fracture resistance and impact strength than the non-metallic material alone, while also limiting the transmission of temperature effects through the  
35 composite versus what would be experienced if only metal

were used.

US 4,569,865 discloses light weight, corrosion resistant automotive bumpers including thin metal outer shells bonded to rigid but resilient foamed plastic cores. An intermediate primer layer preferably of ethylene copolymer is used in the bonding process. The metal is preferably stainless steel or aluminum. Because no bolts are used, the metal layer offers superior corrosion resistance and a smooth appearance.

US 4,682,809 describes a body construction for lightweight passenger vehicles including an elongated shell of highly impact resistant plastics material. A metal chassis is secured to this shell to form an integrated composite structure. This construction offers improved rigidity for body constructions of battery-powered vehicles.

While each of the above approaches may be of interest in their respective selected applications, they are not readily adaptable to a wide range of uses. For example, each requires reinforcing fibers or foamed materials or is limited in scope to large shell-type applications. These and other teachings are generally representative of the techniques and constraints evidenced to date in developing structures of this variety.

There is a need therefore for an integral structure of metal and plastic, in which the plastic is firmly secured to the metal and can nevertheless be injection molded using conventional molding techniques and without requiring special processing.

An object of the instant invention is to provide useful integral structures of metal and plastic in which the materials are effectively joined to form rigid and durable assemblies. A further object of the instant invention is to provide such structures whereby the designer can incorporate plastic ribs to provide further support as may be required for particular applications. A feature of the instant invention resides in the variety of shapes that can be fashioned using the approaches described herein, and with them the number of applications for which this invention is suitable. An advantage of the instant invention is the range of materials that may be selected and suitable for forming integral structures therefrom.

These and other objects, features, and advantages will become better understood upon having reference to the following description of the invention.

20

#### SUMMARY OF THE INVENTION

An integral structure is disclosed comprising a metal surface and one or more plastic support members attached thereto. The metal surface comprises at least one edge portion formed sufficient to secure at least one support member therealong.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be better illustrated upon having reference to the drawings herein and as follows:

30

FIGURE 1 is a perspective view in partial transparency of a structural component of the present invention and

having metal and plastic members;

FIGURE 2 is a perspective view of another embodiment of a structural component of the present invention, depicting  
5 a substantially larger metal portion than in the previous figure; and

FIGURE 3 is a cut-away view of still another embodiment of a structural component of the present invention,  
10 depicting a metal stamping with overmolded plastic incorporated thereupon.

#### DETAILED DESCRIPTION OF THE INVENION

Having reference to Figure 1, there is shown  
15 generally an integral structure 10 of metal with molded plastic. In this illustration the main member 1 of the structural component is metal, and includes edge portions 2. At least one edge portion 2 or any part thereof is formed with an undulating or serrated pattern (shown in  
20 the transparent portion of the drawing) to promote better contact and a more secured fit of the molded plastic to the edge. Another means of achieving this enhanced contact and fit (and also shown in Figure 1) is to provide a bend or curve 8 in the main member 1, again in  
25 the area of contact with the plastic.

There are no restrictions on the exact configuration of the undulating or serrated pattern of the edge portion 2 or of the aforementioned bend or curve 8. One skilled  
30 in the art will select a suitable design to conform to the dimensional constraints of the integral structure 10 and at the same time meet the functional specifications required of the structure itself.

Referring once more to Figure 1, support members 3 attach to the main member 1 at respective edge portions 2. As shown, these support members 3 extend generally perpendicular to the main member 1, in effect forming "side walls". The support members 3 in this illustration are formed from plastic. Ribs 4 are also formed from plastic as shown and connect the support members 3 to each other and provide additional rigidity to the integral structure as warranted. One skilled in the art will selectively introduce the ribs 4 as one of many possible approaches to providing a more rigid assembly.

Having reference to Figure 2, another variant of the integral structure is shown generally at 20. In this illustration, the main member 1 that is formed from metal is formed into an "L"-shaped design, so that it simultaneously serves as both a base and a sidewall. Other features of the figure are as depicted in Figure 1, except that rib supports 5 are positioned between the ribs 4 and the sidewall portion of the main member 1. Moreover, the rib supports 5 connect with lip 6, which serves to lock with the main member 1. These rib supports 5 and lip 6 are made of plastic.

Another design for an integral metal and plastic structure is shown in Figure 3 generally at 30. It incorporates several design features earlier depicted in Figures 1 and 2, with the exception of the aperture 7 formed along the surface of main member 1. Further, the ribs 4 are arranged in a unique pattern to traverse the aperture 7.

Materials suitable for practice in conjunction with the structure of the invention are limited only by the

intended shape and function of the structure itself. For example, metals useful with this invention may be of a more conventional variety (eg steel, aluminum, nickel and the like) or may be selected for their properties that benefit specialized applications (eg titanium, brass and the like). Likewise, plastics useful with this invention include not only polyamides (such as ZYTEL ® nylon resins available from E.I. DuPont de Nemours & Co.) but also polyesters, liquid crystalline polymers, and the like. Polymers which may be injection molded are particularly preferred.

The structures herein may be produced using conventional metal working and plastic molding techniques, all as will be readily appreciated and known by those having ordinary skill in the art. Metal stamping operations are noted as of particular interest, coupled with the injection molding of polymer resin onto the formed metal surface to develop the metal/plastic structure.

A wide range of uses is contemplated for structures as disclosed herein. One area of particular interest is in module assemblies such as those of interest to automotive applications. A module assembly is a self-contained assembly of electronic and mechanical components. Often these modules require intricate backbone structures which can benefit from the technology of combining both plastic molding for function and detail with metals for strength, stiffness and dimensional control. For example, and owing to the balance of metal with plastic in a way that forms a rigid, durable assembly capable of supporting numerous elements, such structures provide a platform upon which one can secure a

number of automobile parts. One such platform is known as a "front end module", and provides an intricate molding for the attachment of headlight assemblies, shrouds, wiring harnesses, and the like.

5

It is readily apparent to those having skill in the art that a number of variations in design and materials selection are within the scope and purview of this invention. Such variations are considered as within the scope thereof.

10

## IN THE CLAIMS

1. An integral structure comprising a metal surface and one or more plastic support members attached thereto,  
5 wherein said metal surface comprises at least one edge portion formed sufficient to secure at least one support member therealong.

2. The integral structure of Claim 1 further  
10 comprising ribs incorporated therealong.

3. The integral structure of Claim 1 wherein said metal surface has an aperture formed therein.

15 4. The integral structure of Claim 1 wherein said plastic support members and ribs are made of polyamide.

5. An article made from the integral structure of Claim 1.

20

6. A front end module made from the integral structure of Claim 1.

1/2

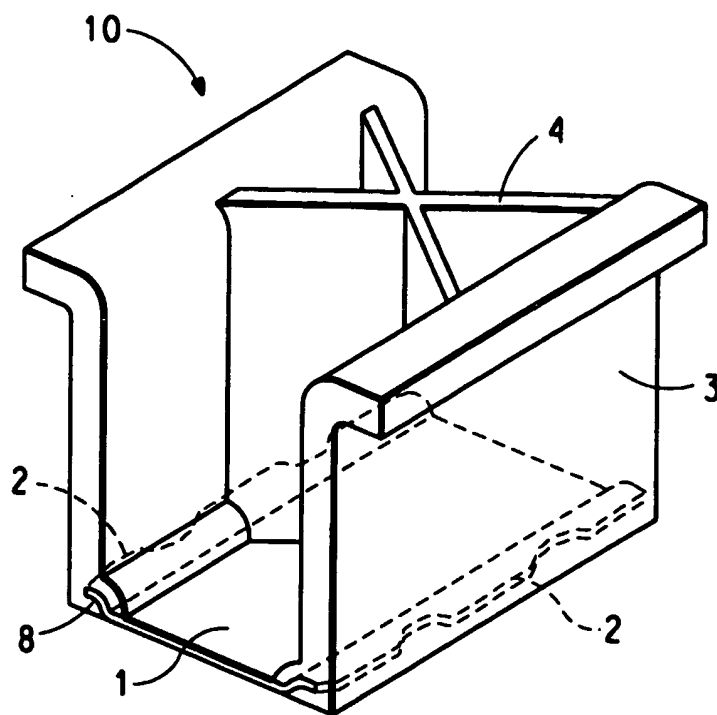


FIG. 1


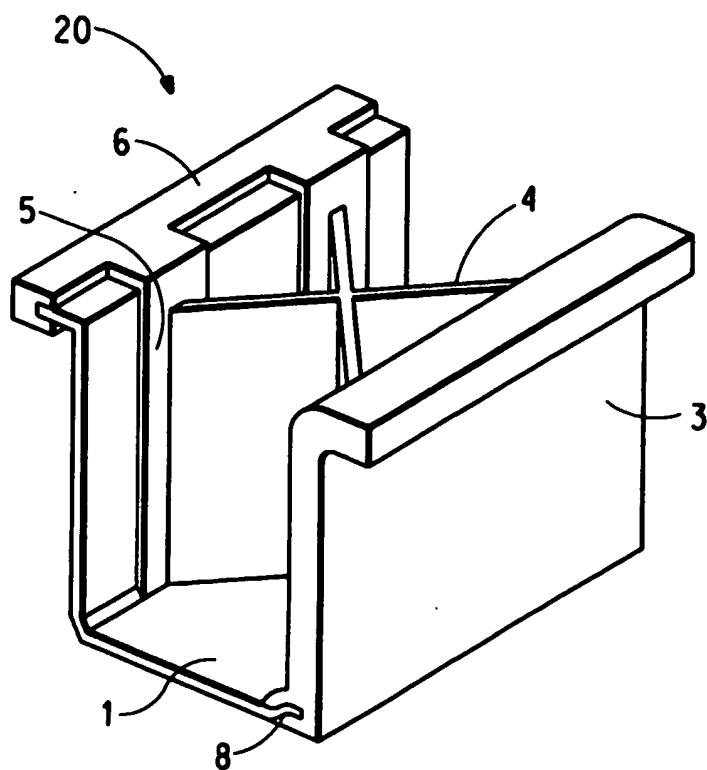


FIG. 2

2/2

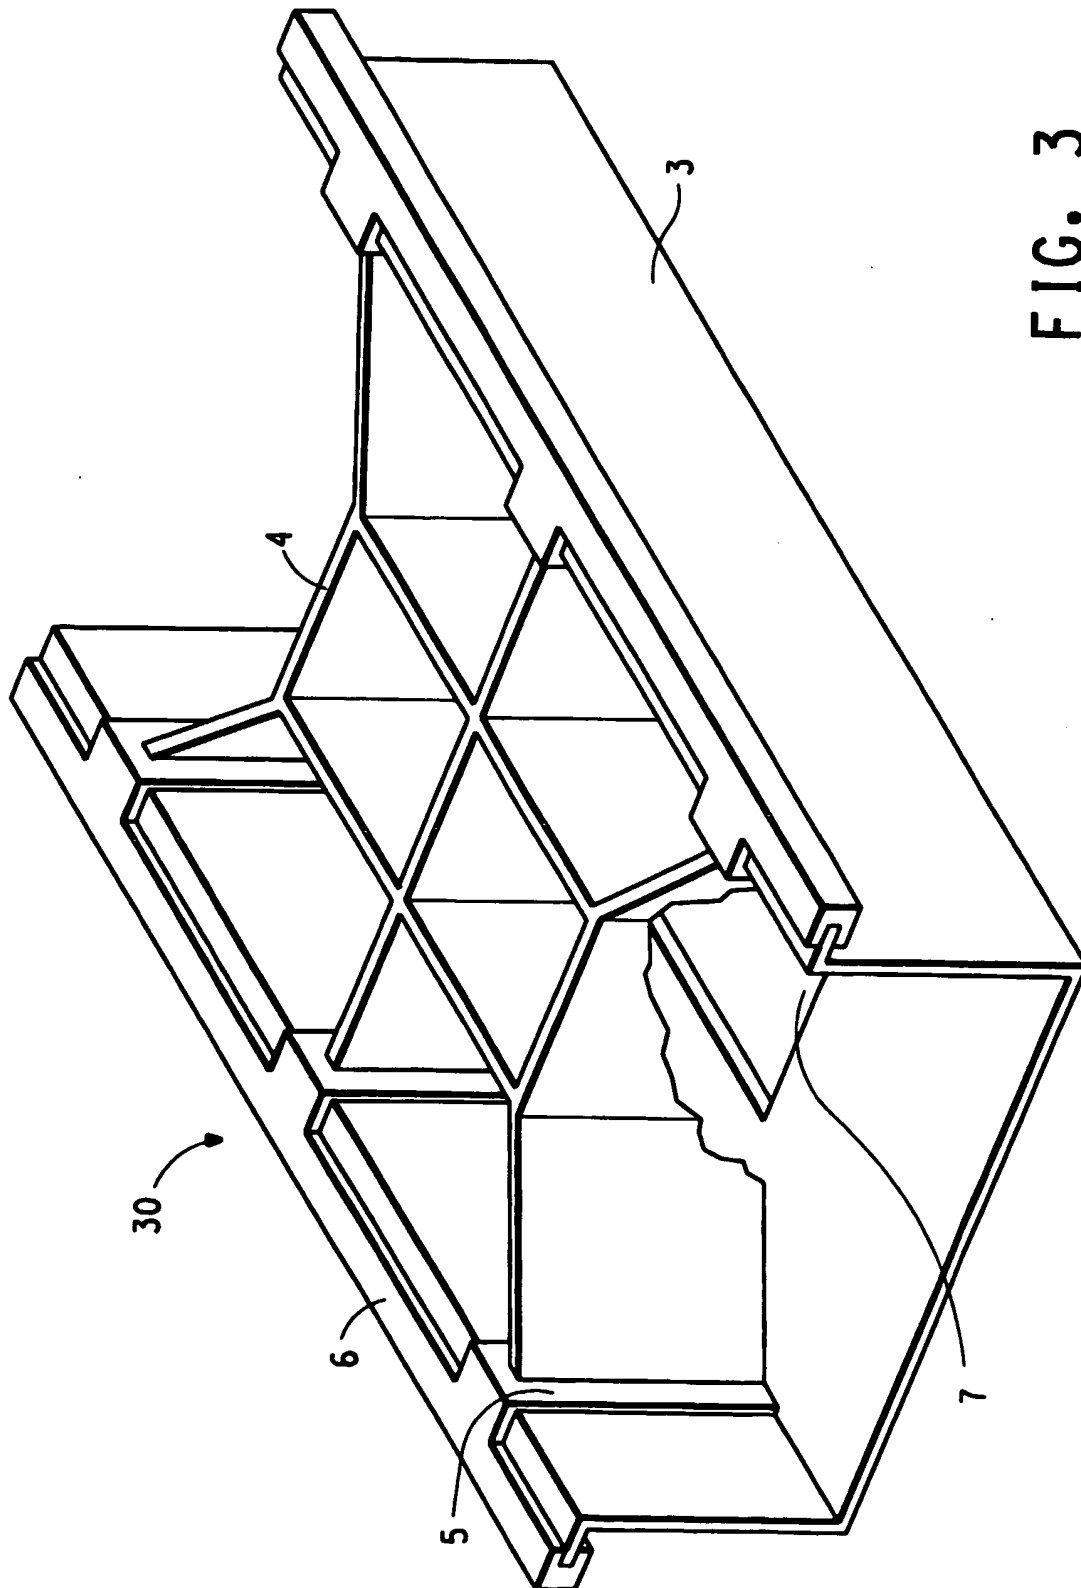

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/06396

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 B62D29/00 B29C45/14

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B62D B29C B21D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 190 803 A (GOLDBACH HUBERT ET AL) 2 March 1993 (1993-03-02) column 2, line 64 -column 3, line 33; figures 1,2 ---	1-6
X	US 5 580 122 A (MUEHLHAUSEN MARK) 3 December 1996 (1996-12-03) column 2, line 23 -column 3, line 40 ---	1-6
X	WO 00 56517 A (OP DE LAAK MARCEL ;POTSCH GERHARD (DE); RHODIA ENGINEERING PLASTIC) 28 September 2000 (2000-09-28) page 9, line 12-29; figures 2,3 ---	1-6
A	EP 0 995 668 A (BAYER AG) 26 April 2000 (2000-04-26) column 10, line 7-35; figure 9 ---	1-6
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*A\* document member of the same patent family

Date of the actual completion of the international search

11 July 2002

Date of mailing of the international search report

22/07/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5618 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax (+31-70) 340-3018

Authorized officer

Lorente Munoz, N

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/06396

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 967 138 A (DELPHI TECH INC) 29 December 1999 (1999-12-29) column 3, line 29 -column 5, line 22; figure 1 -----	1-6

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/06396

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5190803	A	02-03-1993	DE 3839855 A1	31-05-1990
			DE 58905258 D1	16-09-1993
			EP 0370342 A2	30-05-1990
			ES 2041942 T3	01-12-1993
			JP 2199400 A	07-08-1990
			JP 2931605 B2	09-08-1999
US 5580122	A	03-12-1996	DE 4409081 C1	20-04-1995
			EP 0672576 A1	20-09-1995
			ES 2098981 T3	01-05-1997
WO 0056517	A	28-09-2000	FR 2791297 A1	29-09-2000
			FR 2803241 A1	06-07-2001
			AU 3302100 A	09-10-2000
			EP 1163094 A1	19-12-2001
			WO 0056517 A1	28-09-2000
EP 0995668	A	26-04-2000	DE 19848516 A1	27-04-2000
			EP 0995668 A1	26-04-2000
			JP 2000130689 A	12-05-2000
			PL 336136 A1	25-04-2000
EP 0967138	A	29-12-1999	DE 19828435 A1	30-12-1999
			EP 0967138 A2	29-12-1999